

CMSL40/T




FEATURE:

- Low impedance 8 input ceiling loudspeaker
- 6" +1.5" coaxial fibre speaker unit
- Hi_ level speaker for home use
- RMS 20W and MAX 40W power output
- Built-in crossover
- Metal grille & ABS baffle
- Paint in white color
- Flush mount secure installation

DESCRIPTION:

ALL HEINRICH CMS SERIES CEILING LOUD SPEAKER are EN 54 Approved, The CMS40/T is a low impedance 8 input ceiling mount speaker, it is built-in 6" +1.5" coaxial fibre speaker driver and a crossover is equipped to achieve hi- level sound performance of frequency response 60-18kHz, and the RMS 20W and MAX 40W power output are suitable for foreground and background music system. The metal grille and ABS baffle are painted in attractive white color. Its flush mount type makes the easy and secure installation. The hi-fi sound quality and excellent frequency response make it is ideal choice for residential and commercial applications in hotel, school, office and factory where background music and paging is needed.

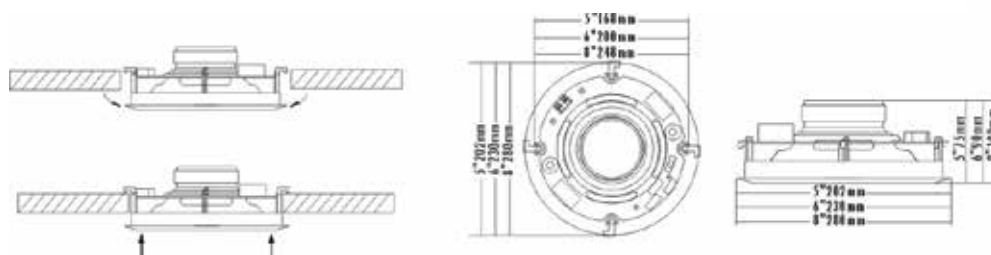


As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice

SPECIFICATION:

Model	CMSL40/T
Power Taps @100V	20W
Power Taps @70V	40W
Impedance	Black: Com Red: 8Ω
Max. SPL	85dB
SPL(1W/1M)	100dB
Frequency Response (-10dB)	60-18KHz
Finish	Baffle: ABS, White Grille: Steel, White
Speaker Driver	6" x 1 1.5" x 1
Cutout Size	200mm
Dimensions	230 x 90mm
Weight	1.3Kg
Mounting	Flush-mount dog ears

Direction Diagram:

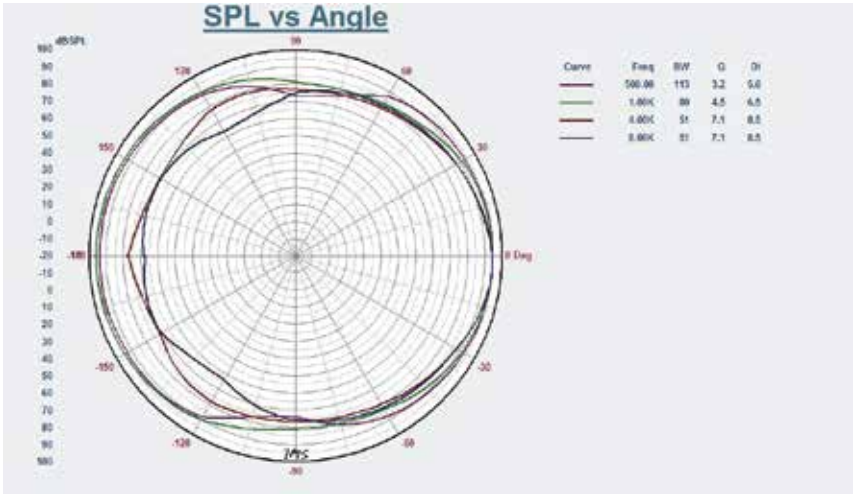

Frequency Response:



As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice