

### **Description:**

HF-MM100 is an intelligent addressable monitor module, which can be configured with Heinrich's Addressable Fire Alarm Control Panel. Each point (devices) can be given specific ID or individual address, which allows the panel to continuously monitor specific location (point). The module has a panel controlled LED indicator.

#### Features:

- Addressable-analog communication
- Two-wire connection
- Two LEDs one is Green, which blinks in normal condition and another one is red which becomes steady during fire alarm condition.
- Remote test from Panel

## **Specification:**

Model	HF-MM100
D/C	1715
Operating Voltage	18V-28V DC
Standby Current	≤5mA
Alarm Current	≤ 25mA
Temperature	-10℃~50℃






# **ADDRESSABLE MONITOR MODULE**

#### **Installation:**

- MM-210 addressable monitor module must be installed as per the final drawings and wiring diagram.
- Set the address on the monitor module using programmer.
- Secure the module in the electrical box, supplied with the monitor module.

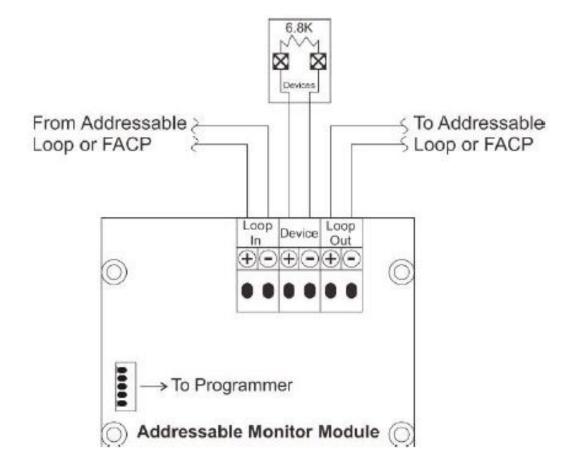

**Disclaimer**: As per our company policy one of the constant product improvements the right is there for reserved to modify the product specification without prior notice and the picture shown in the datasheet is a design base, the actual picture may vary.

