

ADDRESSABLE ANNUNCIATOR MODULE

HF-RP




Description:

Heinrich HF-RP is provided using an 80 character, back-lit, alphanumeric display. Information messages includes for Alarm, Fault, Supervisory and General Conditions in a clear and descriptive english language. Moreover, LEDs for Fire, Supervisory and Alarm are also provided with ACK push button. From the silence push button, panel and remote notification appliances can be silenced.

Features:

- Addressable-analog communication.
- Two Lines of 40 Character each LCD.
- LED Indication for Alarm, Fault and Supervisory.
- Push Buttons to acknowledge and silence the alarm.
- Lamp Test from Key Switch.

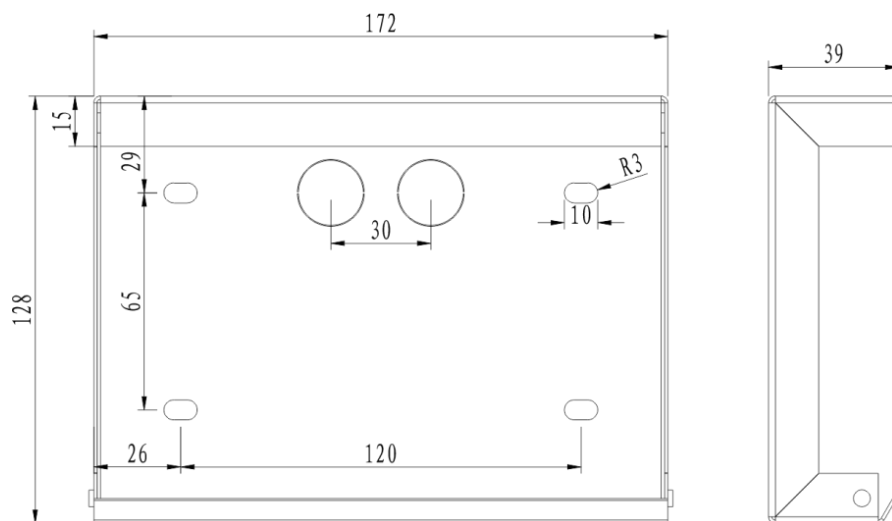

ADDRESSABLE ANNUNCIATOR MODULE

Specification:

Model	HF-RP
Operating voltage	18~28VDC @Loop
Operating current(@Loop 24VDC)	Monitoring status $\leq 30\text{mA}$
Wiring	The promise of two bus system(Loop in, Loop out)
Protection level	IP 30
Environmental	Temperature range: $-10\sim 50^{\circ}\text{C}$ ($14\sim 122^{\circ}\text{F}$)
	Humidity: 5 to 95% RH, non-condensing
Size(L*W*H)	172mm* 128mm* 39mm

Disclaimer: As per our company policy one of the constant product improvements the right is there for reserved to modify the product specification without prior notice and the picture shown in the datasheet is a design base, the actual picture may vary.