

8 Zone Remote Microphone

DVA 8-500RM



FEATURE:

- √ Easy intuitive and user Friendly Operation.
- √ Configurable PPT paging mode and Normal Paging Mode.
- √ 9 Level of Configurable priority.
- √ Support 24V phantom Power Supply, No need Extra power adapter.
- √ System Capacity of 32 Unit Microphone.
- √ Signal transmission ensure distance up to 600 meters.
- √ Redundancy loop wiring for Microphone Supervision

FUNCTION:

DVA 8-500RM is used to remote zone paging over the DVA8 system , support 12 zones and 12 groups program Mable control. Support the redundant cable wiring, system capacity of 32 units and communication distance up to 600 meters, the paging microphone will be real time monitored by the system.

SPECIFICATION:

Model	DVA8-500RM		
Description	32 Units		
System Capacity	600 Meters		
Communication Distance	Star Connection or Loop Redundancy Connection		
System Connection	12 Zones or 12 Group of Zones		
Zone Number	PPT & Normal Paging Mode		
Paging Mode	Phantom Power Voltage	20V – 27.5V	
Electrical Part	Max Current	< 0.1A	
Line Input	Power Consumption	< 2.4A	
Microphone Input	Sensitivity	775 mV	
Working Environment	Impedance	10 k Ω	
Mechanical Part	S/N Ratio	> 70 dB	
	Sensitivity	5 mV	
	Impedance	600 Ω	
	Operation Temperature	5°C ~40°C	
	Storage Temperature	20°C~70°C	
	Relative humidity	<90%	
	Dimension	240 x 140 x 55 (W x D x H) mm	
	Weight	1 Kg	
Finish	Aluminum case in black		

As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice




8 Zone Remote Microphone

DVA8-500RM



Description:

DVA8-500RM is a remote paging microphone work with DVA-8 500, which is of 8 zone paging features, its communication distance up to 300 meters through straight CAT6 cable, each amplifier capacity of connection up to 8 units of remote paging microphone, these microphone are connected hand-by-hand. These 8 remote paging microphones could be pre-set different priorities by its dipswitch. The remote paging microphone is direct power supplied by the amplifier.

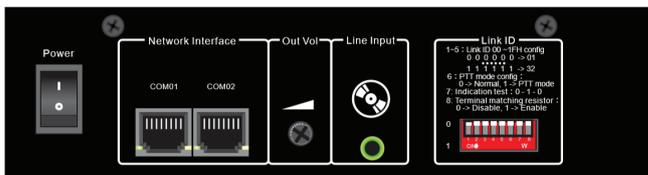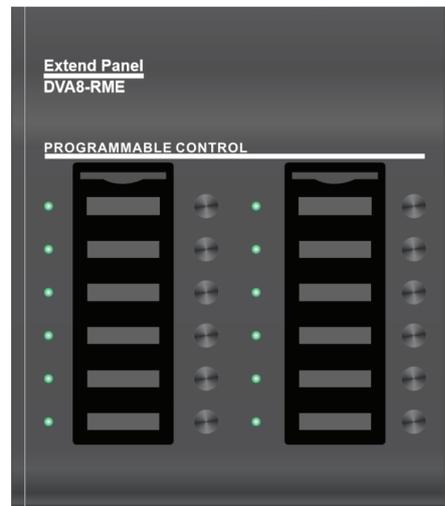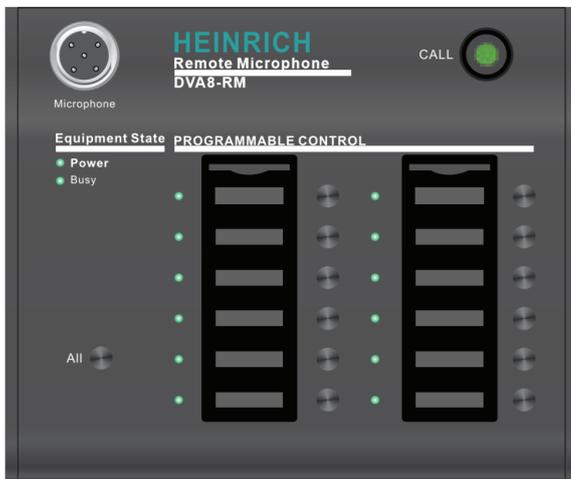

As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice