

Weatherproof Telephone

H104-SC-Analogue



DESCRIPTION:

Heinrich's Hands-free Telephone is designed to meet the needs of customers who experience loss through vandalism. It is ideal to use in buildings, lifts/elevators, railway/metro platforms, hospitals, police stations, ATM machines etc.

It is housed in a stainless steel/aluminium die cast and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times. The cable entrance is on the back of the phone to prevent artificial damage, while the faceplate is weather and vandal Resistant.

FEATURE:

- Standard analogue telephone.
- Robust housing, constructed of stainless steel/aluminium die cast.
- Vandal resistant metal button.
- Hands free operation.
- Flush mounting, simple installation.
- Weather proof protection: IP65.
- Built-in induction loop to provide better reception for the hearing-impaired.
- Phone line powered for phone; DC12V powered for induction loop by in-built SMPS.
- 4 X Tamper proof screws for mounting.

Weatherproof Telephone


SPECIFICATIONS:

Standard Analogue

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

Model	H104-SC-Analogue
Analogue	
Dialing	MF (tone)
Power Supply	Drawn from telephone line for Phone, DC12V powered for induction loop
Lightning / Transients	Protection to ITU-T k.21 enhanced levels
Programming	Can be programmed as an auto-dial phone
Technical Specification	
Casing Material	Stainless steel/Aluminium die cast body
Push Button	Stainless steel button
Indicator	Indicator to showing communication status
Induction Loop	Meet the requirements of IEC60118-4 – Magnetic Strength in Audio Frequency Inducting loops for Hearing Aid Purposes
Temperature	Operating: -30°C to +65°C, Storing: -40°C to +75°C
Weather Resistance	IP65
Ringing Tone	Shrill warble tone 80dBA@ 1 metre typical
M.T.B.F.	Calculated to have an M.T.B.F. in excess of 100,000 hours using
Weight	Up to 3kg depending on option

Dimensions

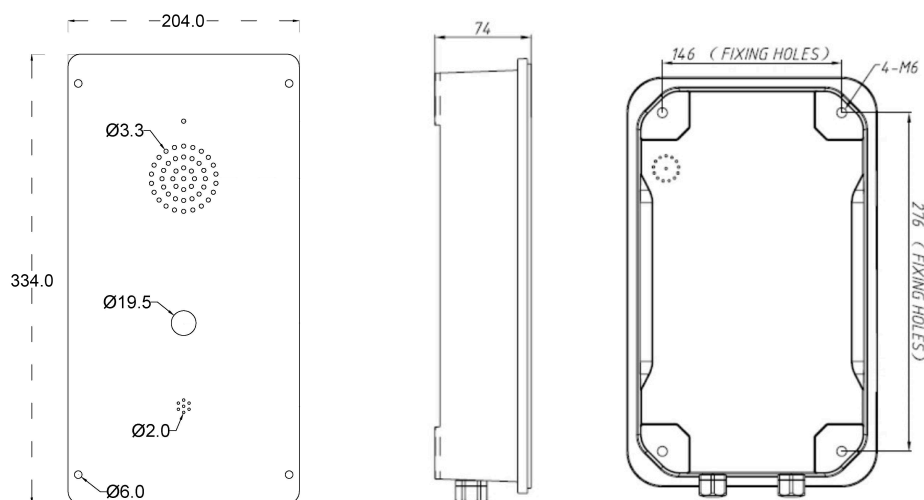

(Measured in mm)

Disclaimer: As per our company policy one of the constant product improvements the right is there for reserved to modify the product specification without prior notice and the picture shown in the datasheet is a design base, the actual picture may vary.