

WEATHERPROOF HORN SPEAKER

OHS20/T




DESCRIPTION:

The OHS20/T is a waterproof horn speaker with a built-in 70V/100V transformer. In addition to reducing line losses over long distances, the 70V/100V transformer technique allows multiple loudspeakers to be connected in parallel and to having a wide frequency response of 250Hz-8KHz, the built-in horn speaker driver also offers multiple power taps of 10W and 20W @100V to suit various applications depending on room size and ambient noise. It is easy to wall mount and comes with an ABS enclosure and a white metal bracket for secure installation. The speaker's opening angle is 90 degrees to 30 degrees, allowing it to provide a wide range of sound coverage. It is perfect for outdoor applications, such as parking lots, parks, gardens, corridors, and playgrounds.

All products comply with the LOW VOLTAGE DIRECTIVE (BS EN 60065, 2003, IEC 60529) and EMC (BS EN 61000-6-Part 1/2/3/4).

FEATURES:

- Built-in 100V/70V transformer.
- Waterproof projector type loudspeaker.
- Supreme longer distance dispersion horn speaker.
- Power taps 10W/20W @100V.
- 90° Horizontal & 30° Vertical opening angles.
- ABS enclosure and metal bracket.
- IP66 waterproof level.

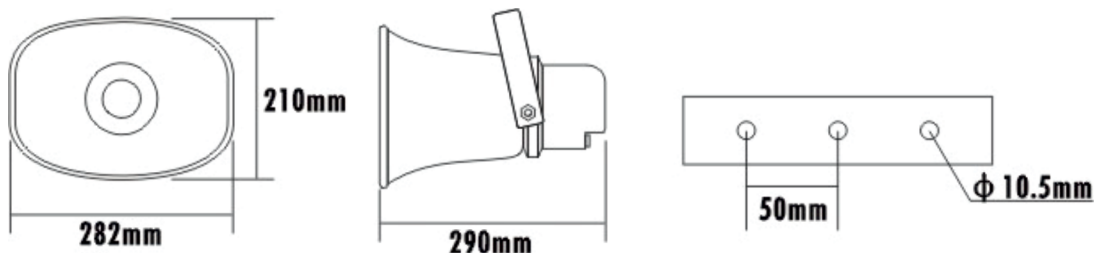


WEATHERPROOF HORN SPEAKER


SPECIFICATION:

Model	OHS20/T
Power Taps @100V	10W/20W
Power Taps @70V	5W/10W
Impedance	Black: Com Green: 670Ω White: 1.3KΩ
SPL(1W/1M)	103dB±3dB
Max. SPL (Rated W/1M)	115dB
Frequency Response (-10dB)	250Hz~8KHz
Finish	Baffle: ABS, White
IP Rate	IP66
Dimensions	221 x 165 x 235mm
Weight	1.6Kg
Mounting	With mounting bracket fixed by screw

Direction Diagram:

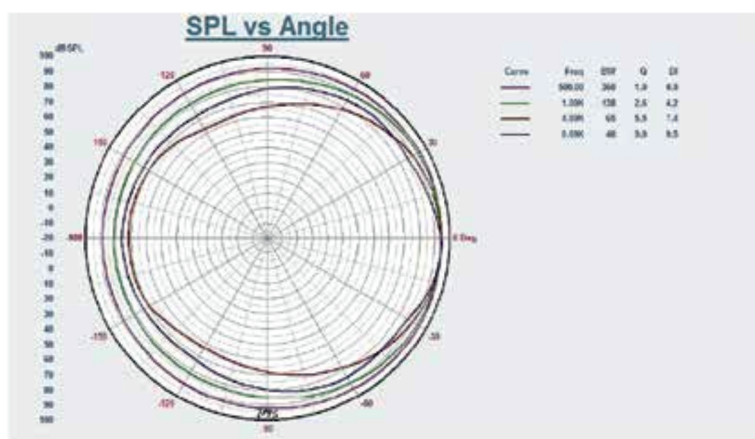

Frequency Response:

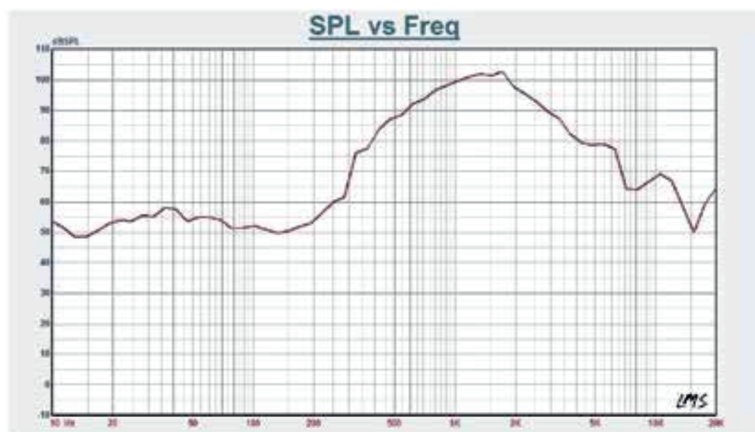

Disclaimer: As per our company policy one of the constant product improvements the right is there for reserved to modify the product specification without prior notice and the picture shown in the datasheet is a design base, the actual picture may vary.