

OUTDOOR HORN LOUDSPEAKER

OHS30/T



DESCRIPTION:


Heinrich's OHS30/T is a waterproof horn speaker with a 70/100 volt transformer. Using 70v/100v transformers reduces line losses over long distances and makes it easier to connect multiple loudspeakers in parallel. With its wide frequency response of 300-13kHz, the built-in horn speaker driver is suitable for different applications based on room size and ambient noise levels. It has multiple power taps 15W & 30W to accommodate a variety of applications.

A white ABS enclosure and stainless steel bracket are used. By using the stainless mounting bracket supplied, this is an easy and secure wall mount installation. Ideally suited for industrial and commercial applications in outdoor areas such as parking lots, parks, gardens, corridors, and playgrounds.

Heinrich Loudspeakers meet IP66 and as per EN54 requirements for terminals and outdoor applications in accordance with IEC60849, BS5839 part 8 OHS compliance as per EASE/CATT/Ulysses.

FEATURES:

- Built-in 100v/70v transformer.
- Waterproof projector type loudspeaker.
- Supreme longer distance dispersion horn speaker.
- IP66 waterproof level.
- Power taps 15w/30w @100V.
- Aluminum enclosure of waterproof finish.
- Stainless steel mounting bracket.

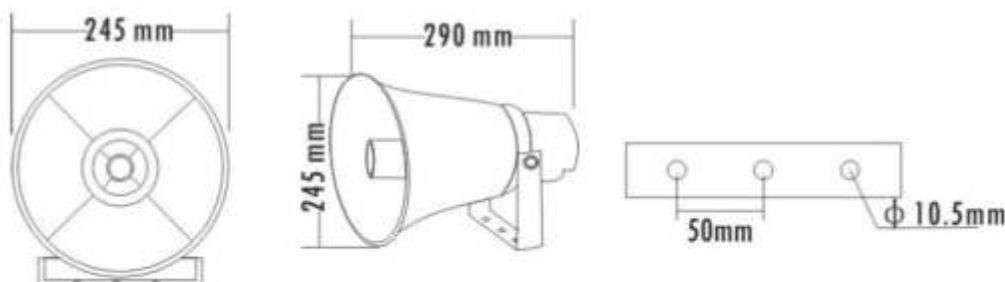


OUTDOOR HORN LOUDSPEAKER

SPECIFICATION:

Model	OHS30/T
Power Taps @100V	15W / 30W
Power Taps @70V	7.5W / 15W
Impedance	Black: Com, White: 330Ohm Green : 670Ohm
SPL (1W/1M)	108dB \pm 3dB
Max SPL (Rated W/1M)	130dB
Frequency Response (-10dB)	300Hz -13KHz
Operating Temperature	-5°C~ 45°C
Finish	Baffle: Aluminum, Rare Cover: ABS, White
IP Rating	Ip66
Dimensions	245 x 245 x 290mm
Weight	1.9Kg
Mounting	With Stainless Mounting Bracket Fixed By Screw

Direction Diagram:

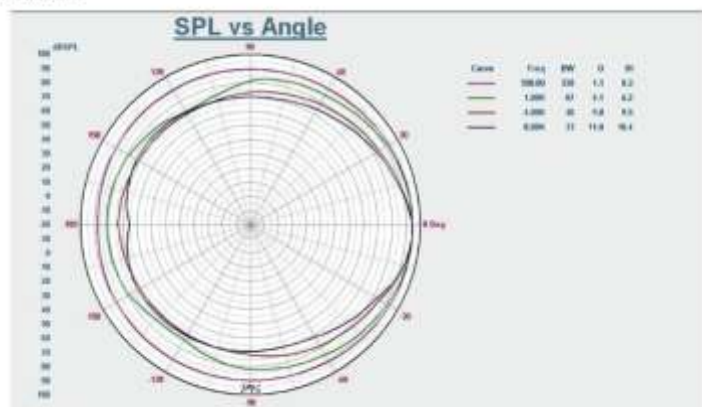

Frequency Response:



Disclaimer: As per our company policy one of the constant product improvements the right is there for reserved to modify the product specification without prior notice and the picture shown in the datasheet is a design base, the actual picture may vary.