

SML6/T




SPECIFICATION:

General Specification	
Model	SML6/T
S.P.L	90dB at 100V 1W1M
Frequency Response	150-15KHz
Sensitivity	98dB
Power Handling	6W
Power Taps	6W/3W
Line Input	100V
Dimension (L*W*H) (mm)	200X105X275
Physical Specification	
Material	ABS
Grill	Power coated Iron Mesh
Component	6.5"
Finished Colour	White
Unit Weight	1.22Kg
Gross Weight	2.6Kg / 2pcs
Packing Dimension	200X105X275
Speaker Specification	
Voice Coil Size	0.12*2layer
DC Impedance	7.2_
Former	Paper
Magnet	Ferrite(153g)
	70*32*10(Y25)
Basket	Iron
Con Material	Paper
Spider	Cloth
Dust cap	Paper Cup
Net Weight	1.14Kg


As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice

Wall Mounted Speaker







Frequency Response VS SPL Diagram

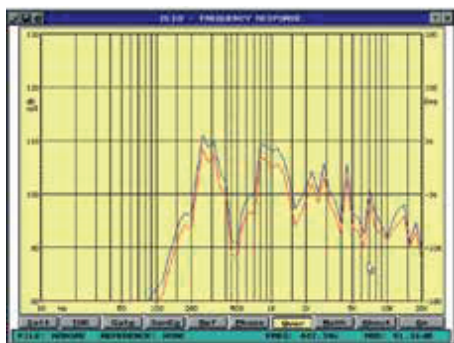

Horizontal:

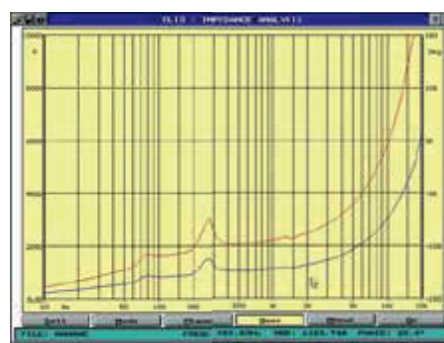

Vertical:

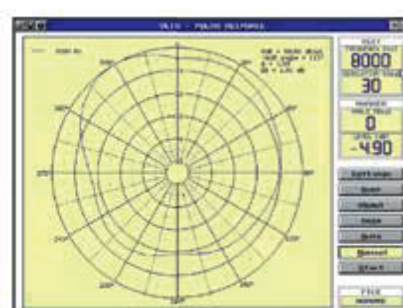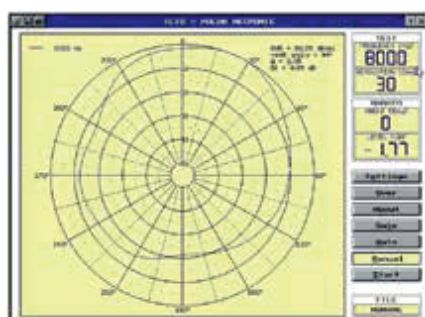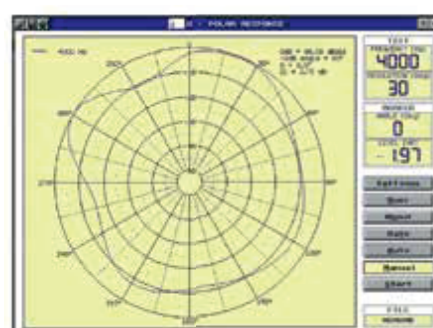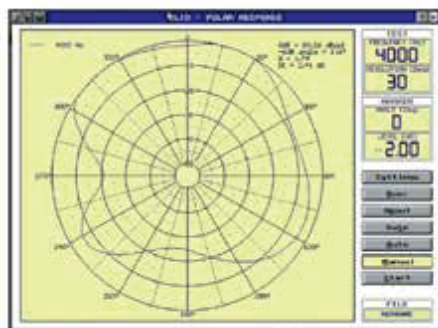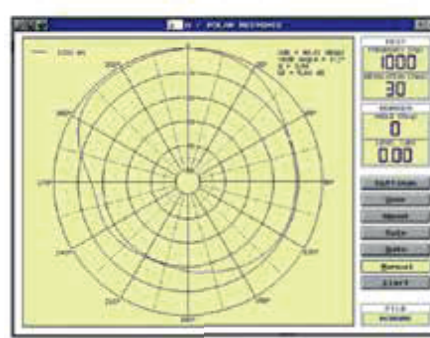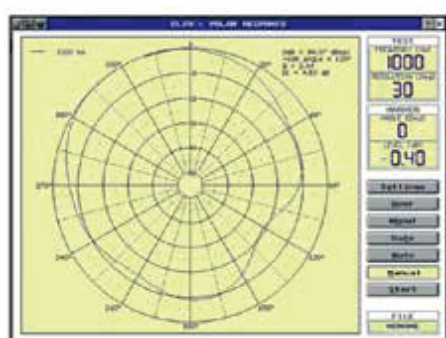

As per our company policy one of the constant Product improvement the right is there for reserved to modify product specifications without prior notice