

Video Visitation Help Point Intercom

H213-V



DESCRIPTION:

H213-V Video Visitation Help Point Intercom is mainly composed of a built-in camera, display screen and two waterproof buttons. Users can easily take video calls for help so that both sides fully feel the feeling of the scene to improve efficiency. H213-V Video Visitation Help Point Intercom is ideal for parking lots, gate, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums etc.

FEATURES:

- SUS 316 Stainless Steel Body
- Weather Protection Ip54
- No Handset
- Version SIP
- 7 Inch LCD (1024*600)
- 5 Point G+G Capacitive Touch Screen
- Front Cam: 5.0 MP With Infrared
- Operating System Android 5.1
- 2 Years Warranty
- Application: Gate, Prisons, Jail, Parking Lots, Hospitals, Guard Stations, Police Stations, Bank Halls, ATM Machines.
- Built-in HD infrared camera.
- Video supports H.264, H.263 encoding.
- Flexible hardware design, rich peripheral interface.
- Adopt hardware DSP echo cancellation technology.
- The chip designs like car's specification, can apply to variety of complex environments easily.
- It adopts the standard SIP (RFC3261) protocol and it's compatible with the main steam IP-PBX platform in the market.
- Support password opening, face opening, remote opening of mobile phone.
- Support Baidu / Yuemian face recognition.


Video Visitation Help Point Intercom

SPECIFICATIONS:


Model	H213-V
System Configuration	
OS	Android 5.1
CPU	Quad-Core ARM Cortex A17 CPU @ 1.8 GHz
RAM	LPDDR3 1G
ROM	EMMC 8G
SIP Protocol	
Codec	G.723.1 / G.729
Audio Format	GSM / PCMU / PCMA / OPUS
Audio Compression codec	Speex-16000 / 8000 / 32000
Support Codec	G.7211-16000 / G.7211-32000
Other Parameters	
LCD	7 inch 1024*600
Touch Panel	5 point G+G capacitive touch screen
Camera	Front cam: 5.0 MP with infrared
USB	Micro usb OTG 2.0
Rj45	IEEE802.3 af
Color	Black
Speaker	10W
Casing Material	
Colors	Blue, Grey, Black or Customize
Handset	No handset
Keypad	2 waterproof stainless steel push buttons
Temperature	Operating: -30°C to +65°C Storing: -40°C to +75°C
Ringing Tone	Shrill warble tone 90 dBA @ 1 metre typical
Face Recognition	Support Baidu / Yuemian face recognition
Door opening methods	Support password opening, face opening, remote opening of mobile phone
Personalized setting	The SIP standard protocol let it makes audio and vedio communicates with the indoor unit
Weather Resistance	IP54
Dimensions	430 *258 *70 (mm)
Net Weight	4 KG

Video Visitation Help Point Intercom

Dimensions :

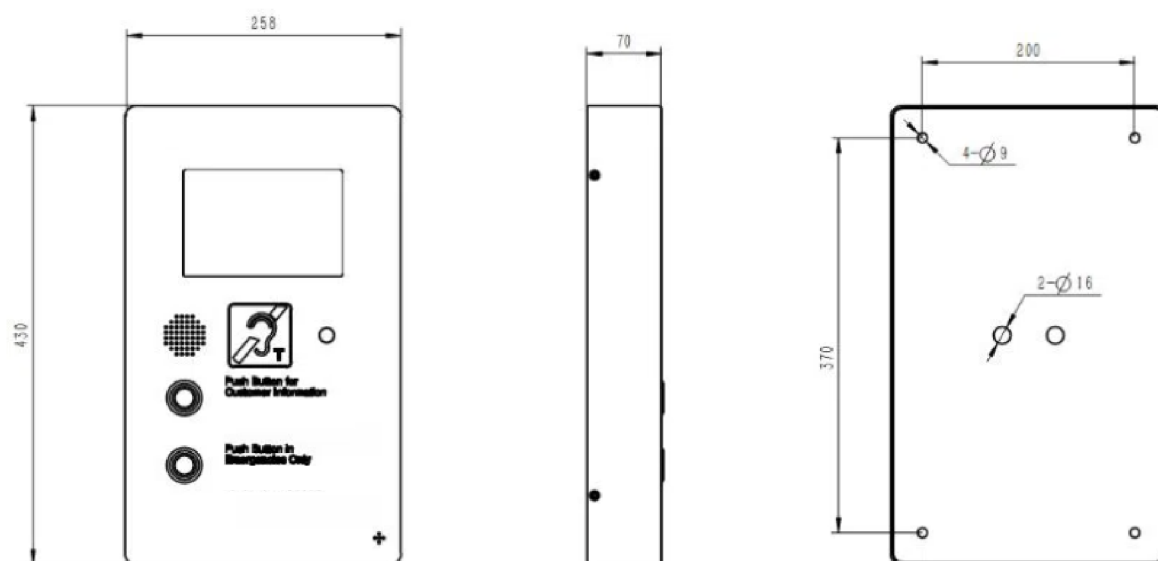

Network Topological Graph

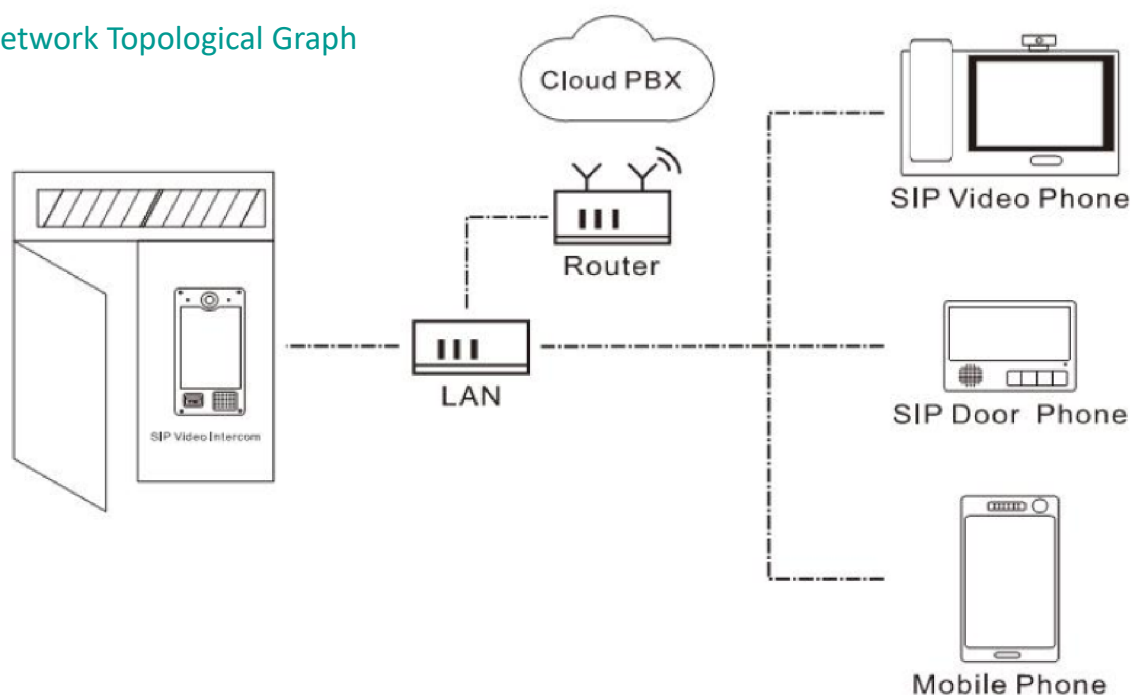

Video Visitation Help Point Intercom

Application :

